

Product Options




8mm x 48" (1.2m)

Since this material is created from reclaimed waste, the color will vary and there may be some visible imperfections.

Physical Data

PERFORMANCE CRITERIA	TEST	RESULT
Tensile Strength	ASTM D412	200 lb/in ² min.
Flexibility	ASTM F137	Pass 1/4-inch mandrel
Static Load (1000 lb/in ²)	ASTM F970	Less than 0.020-inches
Coefficient of Friction	ASTM 2047	Greater than 0.9-inches
Thermal Conductivity	ASTM C518	0.406 BTU-in/hr-ft ² -°F
Ambient Noise Reduction	ASTM C423	0.10 Sabin/ft ²
Impact Insulation Class	ASTM E492	45 Minimum
Sound Transmission Coefficient	ASTM 413	45 Minimum
Ball Rebound	EN 12235	Pass

Can a fitness floor respond to all the “ABLES”?
Durable. Sustainable. Affordable.

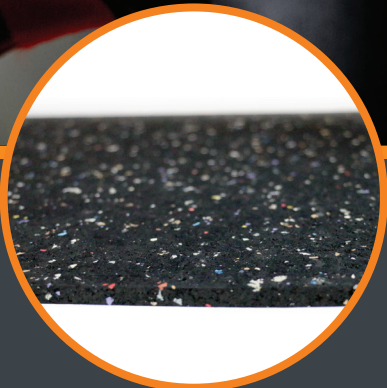

Yes.

Everlast Regrind

is a basic yet durable 8mm rubber surfacing offered in the planet’s most beautiful color: completely recycled.



What does it take to be a floor?


- ✓ Durable
- ✓ Sustainable
- ✓ Affordable
- ✓ Ease of Maintenance
- ✓ Slip Resistant

Offering the pinnacle of closed loop sustainable manufacturing, Regrind optimizes durability and affordability in a product that screams recycled content.



Can a floor do more? Yes.

Ecore Athletic products provide good ergonomics, safety and acoustic benefits.

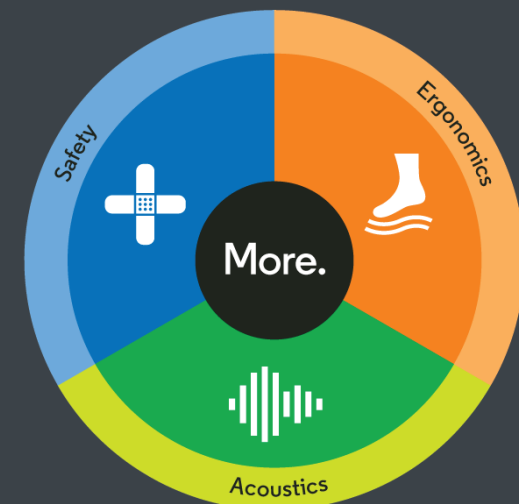

Applications



Cardio



Light Weights



Selectorized Equipment

